



Advertising & Signing

Powerfull lighting tools for
advertising purposes

LED ADVERTISEMENT LIGHT BAR | 24V | INDOOR | 9 WATT



Input: 24V
Power: 9 Watt
LED type: OSRAM LED
Color Temp. (CCT): 7000K
Color LED: Cold white

Beam: 15° x 45°
IP rate: IP64
Connection Type: Male/female
Material: Aluminium



| ART. NR. | POWER | LIGHT OUTPUT | SIZE L*W*H | MAX. TO CONNECT | IP RATE |
|----------|--------|--------------|----------------------|-----------------|---------|
| 128-064 | 9 Watt | 810 Lm | 206 x 27.5 x 15.6 mm | 20 pcs | IP64 |

LED ADVERTISEMENT LIGHT BAR | 24V | OUTDOOR | 15 WATT



Input: 24V
Power: 15 Watt
LED type: OSRAM LED
Color Temp. (CCT): 7000K
Color LED: Cold white

Beam: 15° x 45°
IP rate: IP64
Connection Type: Male/female
Material: Aluminium



| ART. NR. | POWER | LIGHT OUTPUT | SIZE L*W*H | MAX. TO CONNECT | IP RATE |
|----------|---------|--------------|----------------------|-----------------|---------|
| 128-065 | 15 Watt | 1350 Lm | 364 x 27.5 x 15.6 mm | 10 pcs | IP64 |



Advertising & Signing

BACKGROUND MODULE | HIGH POWER LED

Input: 12V
Power: 1,1 Watt
Module qty: 50 modules / 8 meter
LED qty per module: 3
LED type: SMD2835
Dimmable: Yes
Beam: 160°

IP rate: IP65
Length: 74,4 mm
Width: 15 mm
Depth: 9,2 mm
Max. to connect: 50
Connection Type: Stripped wire



| ART. NR. | COLOR TEMP. (CCT) | LED COLOR | LIGHT OUTPUT |
|----------|-------------------|--------------|--------------|
| 125-071 | 7000K | ○ Cold white | 106 Lm |

BACKGROUND MODULE | 3 X 5050 LED

Input: 12V
Power: 0,72t Watt
Module qty: 50 modules / 7 meter
LED qty per module: 3
LED type: Epistar 5050
Dimmable: Yes
Beam: 120°

IP rate: IP65
Length: 62 mm
Width: 17 mm
Depth: 2,8 mm
Max. to connect: 20
Connection Type: Stripped Wire



| ART. NR. | COLOR TEMP. (CCT): | COLOR LED | LIGHT OUTPUT |
|----------|--------------------|--------------|--------------|
| 125-031 | 6000K | ○ Cold White | 40 Lm |
| 125-038 | 3000K | ○ Warm White | 35 Lm |
| 125-034 | n/a | ● Red | n/a |
| 125-032 | n/a | ● Blue | n/a |
| 125-000 | n/a | ● RGB | n/a |

BACKGROUND MODULE | HIGH POWER LED

Input: 12V
Power: 1 Watt
Module qty: 20 modules / 3 meter
LED qty per module: 1
LED type: High power
Dimmable: Yes
Beam: 120°

IP rate: IP65
Length: 67 mm
Width: 37 mm
Depth: 7,5 mm
Max. to connect: 20
Connection Type: Stripped Wire




| ART. NR. | COLOR TEMP. (CCT): | COLOR LED | LIGHT OUTPUT |
|----------|--------------------|--------------|--------------|
| 125-041 | 6000K | ○ Cold White | 70 Lm |
| 125-048 | 3000K | ○ Warm White | 60 Lm |



Advertising & Signing

LED ADVERTISING BACKGROUND PANEL | 24V



EPISTAR

Input: 24V
LED type: Epistar
Color Temp. (CCT): 6000K
Color LED: Cold white
Dimmable: Yes

Beam: 120°
IP rate: IP20
Depth: 2 mm (15 mm at connector)
Connection Type: Screw terminal



| ART. NR. | SIZE | POWER | LED QTY | LIGHT OUTPUT | MAX. TO CONNECT |
|----------|--------------|----------|---------|--------------|-----------------|
| 128-070 | 304 x 304 mm | 24 Watt | 120 | 2400 Lm | 10 |
| 128-071 | 60 x 304 mm | 4,8 Watt | 24 | 480 Lm | 12 |
| 128-072 | 304 x 50 mm | 4,2 Watt | 20 | 400 Lm | 12 |
| 128-073 | 60 x 50 mm | 1,2 Watt | 4 | 80 Lm | 12 |

304 x 304 mm

60 x 304 mm



EASY CONNECTION SYSTEM ANY SIZE POSSIBLE





60 x 50 mm

304 x 50 mm

LED ADVERTISING BACKGROUND PANELS 24V

For maximum light output behind a canvas or panel.

- In 4 sizes, connectable to create any desired size.
- High light output: 100 Lm/Watt, 25.000 Lm/m²
- Power 250W p/m²
- 6000K, IP20, CRI > 85
- No hot spots: optimal distribution LED structure:
- Minimum mounting depth 38mm

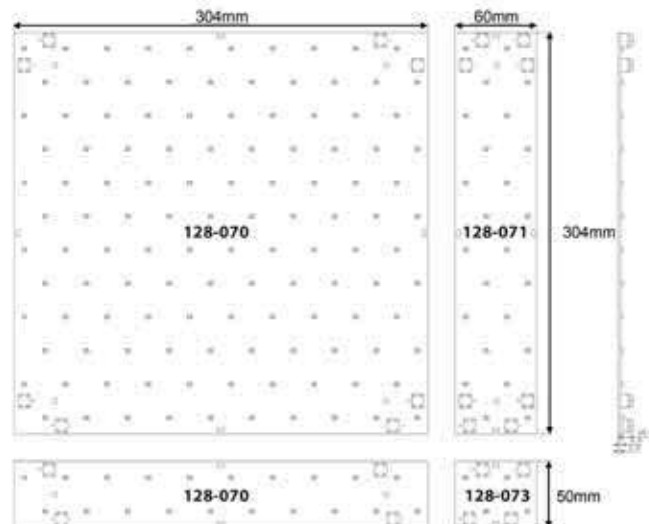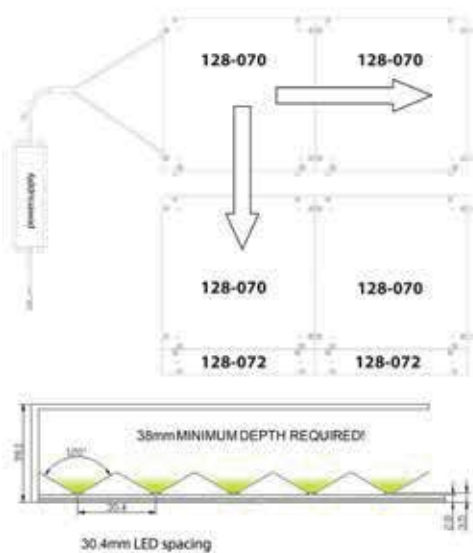



BEVERAGES

| | |
|-----------|-------|
| 354 CAL | 12.00 |
| 364 CAL | 11.00 |
| 180 CAL | 6.00 |
| 6-419 CAL | 6.25 |
| 6 CAL | 5.00 |

NYCFC FLY GIRL
PORK CHOP
NEW

DISCOUNT

NYCFC SAVE FANS 5% ON CONCESSION PURCHASES
MADE WITH

Carl's STEAKS


| | |
|------------------|-------|
| FILET MIGNON | 24.95 |
| FILET OF TENDERS | 19.95 |
| ROAST PORK | 14.95 |
| GRILLED CHICKEN | 12.95 |

BEVERAGES

| | |
|-----------|-------|
| 354 CAL | 12.00 |
| 364 CAL | 11.00 |
| 180 CAL | 6.00 |
| 6-419 CAL | 6.25 |
| 6 CAL | 5.00 |

Advertising & Signing | Neon flex PRO

NEON FLEX PRO | DIGITAL RGB

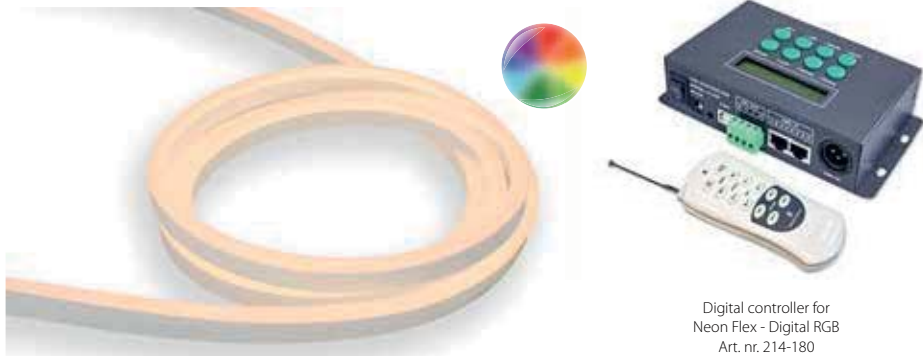

Digital controller for Neon Flex - Digital RGB
Art. nr. 214-180

The power of light communication with your building:
Neon Flex Digital




| NEON FLEX PRO DIGITAL RGB | 30M ROLL | MAX. TO CONNECT | POWER | LED P/M | LIGHT OUTPUT | CUTTING DISTANCE |
|-----------------------------|----------|-----------------|-------------|---------|--------------|------------------|
| ● Digital RGB | 110-146 | 30 meter | 12 Watt p/m | 56 | n/a | 12,5 cm |

NEON FLEX PRO | SINGLE COLOR



| NEON FLEX PRO SINGLE COLOR | 10M ROLL - ART. NR. | 20M ROLL- ART. NR. | MAX. TO CONNECT | POWER | LED P/M | LIGHT OUTPUT | CUTTING DISTANCE |
|------------------------------|---------------------|--------------------|-----------------|--------------|---------|--------------|------------------|
| ○ White 5700K | 110-041 | 110-141 | 20 meter | 12 Watt p/m | 60 | > 380 Lm p/m | 10 cm |
| ○ Warm White 3000K | 110-048 | 110-148 | 20 meter | 12 Watt p/m | 60 | > 380 Lm p/m | 10 cm |
| ● Blue | 110-042 | 110-142 | 20 meter | 12 Watt p/m | 60 | > 40 Lm p/m | 10 cm |
| ● Green | 110-043 | 110-143 | 20 meter | 12 Watt p/m | 60 | > 280 Lm p/m | 10 cm |
| ● Red | 110-044 | 110-144 | 20 meter | 6,5 Watt p/m | 60 | > 120 Lm p/m | 16,7 cm |
| ● Amber | 110-045 | 110-145 | 20 meter | 6,5 Watt p/m | 60 | > 90 Lm p/m | 16,7 cm |
| ● Yellow Color Jacket | n/a | 110-245 | 20 meter | 12 Watt p/m | 60 | > 210 Lm p/m | 10 cm |

NEON FLEX PRO | RGB

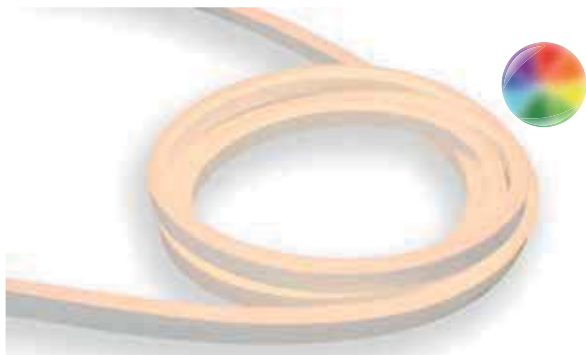

| NEON FLEX PRO RGB | 10M ROLL - ART. NR. | 20M ROLL- ART. NR. | MAX. TO CONNECT | POWER | LED P/M | LIGHT OUTPUT | CUTTING DISTANCE |
|---------------------|---------------------|--------------------|-----------------|-------------|---------|---|------------------|
| ● RGB | 110-040 | 110-140 | 20 meter | 12 Watt p/m | 60 | Red 22 Lm, Green 90 Lm, Blue 18 Lm, White >130 Lm p/m | 10 cm |



ABC Restaurant concept using Neon Flex Professional for creative communication
Project by Griffioen In Vorm – The Netherlands