



Emergency Light

Setting best standards for escape route illumination



Emergency Lights

LED EMERGENCY LIGHT | RECTANGULAR | IP65

Excluding pictogram sticker art. nr. 600-006



Input: 240V
LED qty: 10
LED type: SMD5050
Color temp. (CCT): 4000K
Color LED: Natural White
Lumen: 95 Lm
IP rate: IP65
Operating time: min. 3 hrs
Connection type: Screw
Material: PC/Clear cover

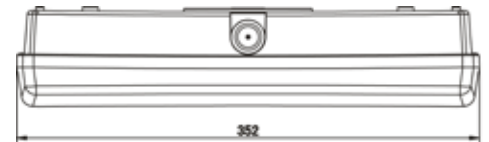

ART. NR.	MOUNTING	POWER	SIZE
600-001	Surface	3,3 Watt	352 x 118 x 75 mm

ART. NR.	ACCESSORY
600-006	Pictogram sticker for emergency bulkhead art. nr. 600-001

LED EMERGENCY LIGHT | DOUBLE BLADE

For recessed or surface mounting

Excluding pictogram sticker - 7 routing designs available



Input: 240V
LED qty: 10
LED type: DIP
Color temp. (CCT): 6500K
Color LED: Cold White
Lumen: 35 Lm
IP rate: IP20

Operating time: min. 3 hrs
Connection type: Screw
Material: Metal/steel housing with acrylic double sided legend panel



Art. nr. 600-002




Art. nr. 600-007



ART. NR.	MOUNTING	POWER	COLOR TEMP. (CCT)	COLOR LED	SIZE
600-002	Surface	3,1 Watt	6500K	○ Cold White	305 x 225 x 45 mm
600-007	Recessed	3,4 Watt	6500K	○ Cold White	410 x 260 x 135 mm

ART. NR. PICTOGRAM STICKERS FOR ART. NR. 600-002 | 600-007


600-010	1. Direction Down	2. Direction Down
600-011	1. Direction Down	2. Neutral Green
600-012	1. Direction Up	2. Direction Up
600-013	1. Direction Up	2. Neutral Green
600-014	1. Direction Left	2. Direction Right
600-015	1. Direction Left	2. Neutral Green
600-016	1. Direction Right	2. Neutral Green

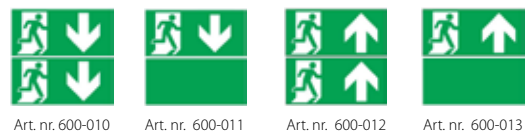




Emergency Lights

LED EMERGENCY SPOT



Input: 240V
LED qty: 1
LED type: SMD
Color temp. (CCT): 3000K
Color LED: Warm White
Lumen: 160 Lm
IP rate: IP20
Operating time: min. 3 hrs
Connection type: Screw
Material: PC housing

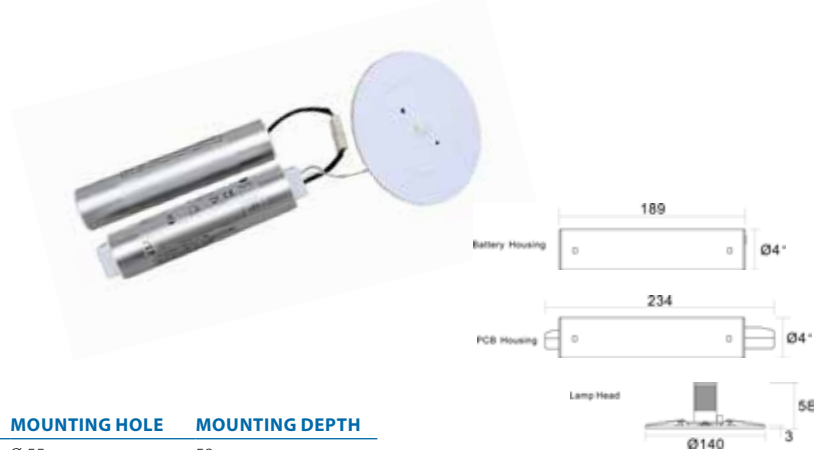


ART. NR.	MOUNTING	POWER	DIAMETER	MOUNTING HOLE	MOUNTING DEPTH
600-003	Recessed	2 Watt	Ø 140 mm	Ø 55 mm	58 mm

LED CEILING EMERGENCY FIXTURE | IP65

Also available in non-emergency version with continuous light (Art. nr. 600-005)



Input: 240V
LED qty: 300
LED type: SMD2835
Color temp. (CCT): 3000K
Color LED: Warm White
IP rate: IP65
Connection type: Screw
Material: PC housing
Beam: 120°

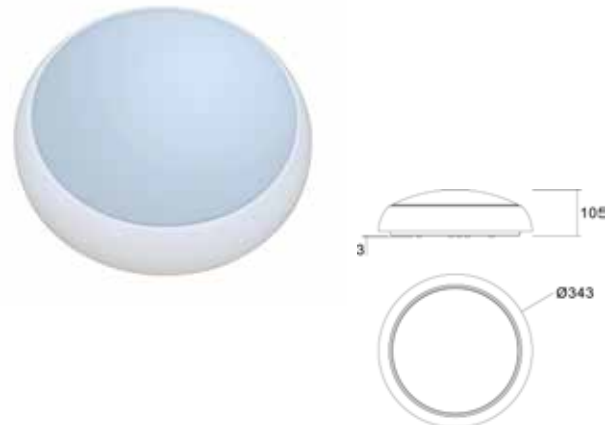

ART. NR.	LIGHT FUNCTION	MOUNTING	POWER	LUMEN	DIAMETER	OPERATING TIME
600-004	Emergency	Surface	16 Watt	1500 Lm	Ø 343 mm	Min. 3 hrs
600-005	Continuous	Surface	13,2 Watt	1500 Lm	Ø 343 mm	n/a

LED EMERGENCY PACK | FOR CONSTANT CURRENT DRIVER



Input: 240V
Load: Max. 65W, with voltage ≤ 40V
Output: <40V DC



ART. NR.	POWER	SIZE	OPERATING TIME
600-008	Max. 65 Watt	204 x 111 x 44 mm	Min. 3 hrs

